




Hutsieb/Schmutzfänger für ASME B16.50

NPS	Class	ØD	Ød	Øa	H mm
1	150	63	25	10	42
	300	69			
1 1/4	150	73	32	12	53
	300	79			
1 1/2	150	82	40	16	63
	300	91			
2	150	101	50	20	78
	300	107			
2 1/2	150	120	60	22	99
	300	126			
3	150	132	75	30	117
	300	145			

NPS	Class	ØD	Ød	Øa	H mm
4	150	171	100	45	143
	300	177			
6	150	219	150	75	194
	300	247			
8	150	276	200	100	262
	300	304			
10	150	336	250	125	323
	300	358			
12	150	406	300	150	388
	300	419			

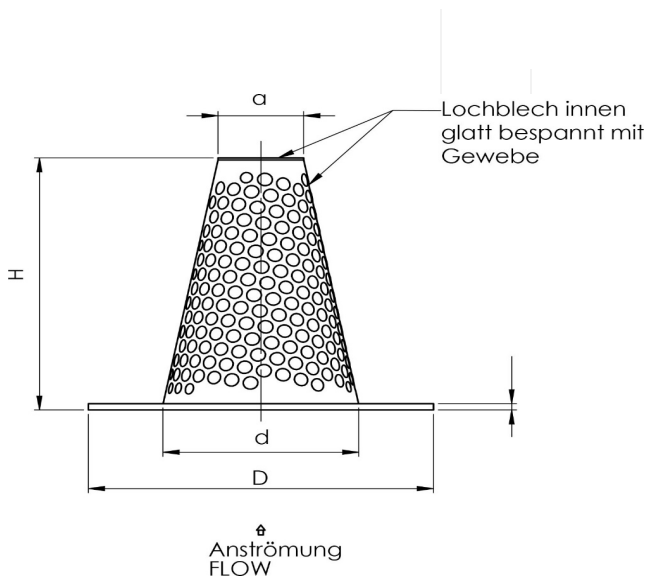

Material 1.4301, 1.4571, Sonderwerkstoffe auf Anfrage
 Gewebe von 0,01 bis 2 mm
 Lochung 2 - 20 mm
 für Flansche nach ASME B16.50, RF und RTJ
 Druckstufen ab Class 600 auf Anfrage
Anströmung von Innen, in den Kegel

